

## PoleonFit



材质 PA 尼龙塑料


防护等级 IP 55


温度环境 -30 °C – 80 °C (-22°F – 176°F)

颜色 灰 (RAL 7031), 黑 (RAL 9005)

RoHS

注：  
- 原材料符合 UL94




尺寸	d mm	D mm	GL mm	H mm	 mm	适配	订货号 灰	订货号 黑
M 12	6,9	18,7	11	26	15	6	1.533.1200.50	1.533.1201.50
M 16	10,8	21,7	11	26	18	10	1.533.1600.51	1.533.1601.51
M 16	10,9	26	11	26,5	20	12	1.533.1600.50	1.533.1601.50
M 20	14,7	28	11	31	23	14	1.533.2000.51	1.533.2001.51
M 20	15,2	32	13	33	27	17	1.533.2000.50	1.533.2001.50
M 25	18,7	39,5	16	39	34	23	1.533.2500.50	1.533.2501.50
M 32	25,7	46,5	16	43	40	29	1.533.3200.50	1.533.3201.50
M 40	32,7	55,5	16	45,5	50	37	1.533.4000.50	1.533.4001.50
M 50	51,4	67,5	16	47,5	62	50	1.533.5000.50	1.533.5001.50
<hr/>								
PG 7	6,9	18,7	11	26	15	6	1.533.0700.14	1.533.0701.14
PG 9	10,3	21,7	11	26	18	10	1.533.0900.14	1.533.0901.14
PG 11	13,3	26	11	26,5	20	12	1.533.1100.14	1.533.1101.14
PG 13,5	15,3	28	11	31	23	14	1.533.1300.14	1.533.1301.14
PG 16	16,6	32	13	33	27	17	1.533.1600.14	1.533.1601.14
PG 21	22,3	39,5	16	39	34	23	1.533.2100.14	1.533.2101.14
PG 29	31,7	46,5	16	43	40	29	1.533.2900.14	1.533.2901.14
PG 36	40,5	55,5	16	45,5	50	37	1.533.3600.14	1.533.3601.14
PG 48	51,7	67,5	16	47,5	62	50	1.533.4800.14	1.533.4801.14

**PoleonFit 90**
**RoHS**
**材质** PA 尼龙塑料

**防护等级** IP 55

**温度环境** - 30 °C – 80 °C (-22°F – 176°F)


**颜色** 灰 (RAL 7031), 黑 (RAL 9005)

**注:**  
 - 原材料符合 UL94


尺寸	d mm	D mm	GL mm	H mm	L mm	适配	订货号 灰	订货号 黑
M 12	8,2	18,7	11	36,3	35,7	6	1.535.1200.50	1.535.1201.50
M 16	10,8	21,7	11	37,3	38,5	10	1.535.1600.51	1.535.1601.51
M 16	10,9	26	11	41	43,8	12	1.535.1600.50	1.535.1601.50
M 20	14,7	28	11	44	46	14	1.535.2000.51	1.535.2001.51
M 20	15,2	32	13	51,5	51	17	1.535.2000.50	1.535.2001.50
M 25	18,7	39,5	16	61,2	64,3	23	1.535.2500.50	1.535.2501.50
M 32	25,6	46,5	16	69,2	70,9	29	1.535.3200.50	1.535.3201.50
M 40	32,7	55,5	16	78,2	88,6	37	1.535.4000.50	1.535.4001.50
M 63	55,2	67,5	16	91,2	95	50	1.535.6300.50	1.535.6301.50
PG 7	8,2	18,7	11	36,3	35,7	6	1.535.0700.14	1.535.0701.14
PG 9	10,3	21,7	11	37,3	38,5	10	1.535.0900.14	1.535.0901.14
PG 11	13,3	26	11	41	43,8	12	1.535.1100.14	1.535.1101.14
PG 13,5	15,3	28	11	44	46	14	1.535.1300.14	1.535.1301.14
PG 16	16,6	32	13	51,5	51	17	1.535.1600.14	1.535.1601.14
PG 21	22,4	39,5	16	61,2	64,3	23	1.535.2100.14	1.535.2101.14
PG 29	31,7	46,5	16	69,2	70,9	29	1.535.2900.14	1.535.2901.14
PG 36	40,5	55,5	16	78,2	88,6	37	1.535.3600.14	1.535.3601.14
PG 48	51,7	67,5	16	91,2	95	50	1.535.4800.14	1.535.4801.14

# PA 塑料配件


## PoleonFit Clip

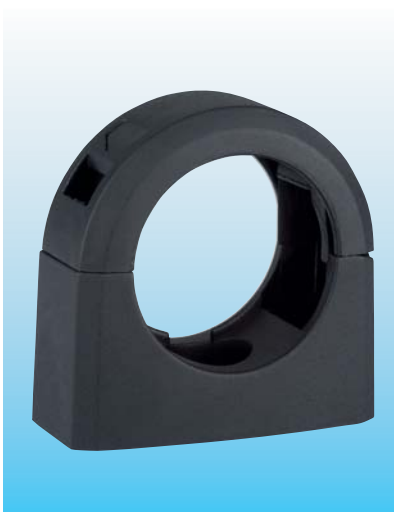

材质 塑料

环境温度 -30 °C – 80 °C (-58 °F – 248 °F)

颜色 黑

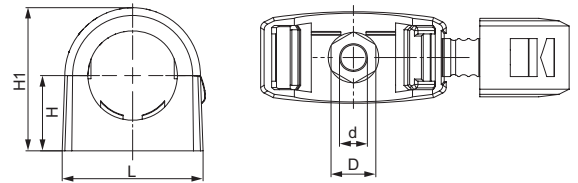

尺寸	d mm	D mm	L mm	H mm	H1 mm	适配	订货号 黑
DN10	4,2	7,5	22,6	12,9	23,3	10	1.534.0901.00
DN12	4,2	7,5	22,6	12,9	23,3	12	1.534.1101.00
DN17	5,1	8,8	26,7	15,1	26,9	17	1.534.1601.00
DN23	6,1	10,4	33,8	19,1	34	23	1.534.2101.00
DN29	6,1	10,3	43,8	23,4	43,7	29	1.534.2901.00
DN37	6,2	10,2	52,8	26,9	51,6	37	1.534.3601.00
DN50	6,2	10,2	81	38,5	77	50	1.534.4801.00


PoleonFit T

材质 PA 尼龙塑料

防护等级 IP 67

温度环境 -40 °C – 80 °C (-40°F – 248°F)

颜色 黑



尺寸	L mm	H mm	适配	订货号 黑
DN10	50	68,5	10	1.536.0901.00
DN12	50,5	69,5	12	1.536.1101.00
DN17	58	80	17	1.536.1601.00
DN23	71	95	23	1.536.2101.00
DN29	84	109	29	1.536.2901.00

## PA 塑料配件

### PoleonFit Y




材质 PA 尼龙塑料

防护等级 IP 66

温度环境 -40 °C – 120 °C (-40 °F – 248 °F)

颜色 黑



尺寸	d mm	D mm	A mm	H mm	H1 mm	L mm	适配	订货号 黑
DN10/06/06*	5	21,2	21	32,7	69,3	28,2	10/06/06	1.537.0901.00
DN12/10/10	5,5	22,3	25	31	74	42	12/10/10	1.537.1101.00
DN17/12/12	6,5	28	32	32	85	51	17/12/12	1.537.1601.00
DN23/17/17	6,5	36,4	38	38	90,5	63,8	23/17/17	1.537.2101.00
DN29/23/23	6,5	43	45	37	106	76,8	29/23/23	1.537.2901.00
DN37/29/29*	6,5	52,5	53,5	48,3	125,7	95,9	37/29/29	1.537.3601.00
DN50/37/37*	6,5	66,5	64	53	129	109,4	50/37/37	1.537.4801.00

\* 请垂询

## PoleonFit N

Metr., PG, NPT





材质 PA 尼龙塑料

防护等级 IP 54, O 型圈  
固定软管安装 IP 65

温度环境 -20 °C – 80 °C (-4 °F – 176 °F)

颜色 灰 (RAL 7031), 黑 (RAL 9005)



尺寸	D mm	GL mm	H mm	 mm	适配	订货号 灰	订货号 黑
M 16 x 1,5	20	8	23	17	10	1.511.1600.50	1.511.1601.50
M 20 x 1,5	26,5	9	28	24	14	1.511.2000.50	1.511.2001.50
M 25 x 1,5	38,5	11	32	35	23	1.511.2500.50	1.511.2501.50
M 32 x 1,5	46	11	35	42	29	1.511.3200.50	1.511.3201.50
PG 9	19	8	23	17	10	1.511.0900.14	1.511.0901.14
PG 11	23	8	25	21	12	1.511.1100.14	1.511.1101.14
PG 13,5	26,5	9	28	24	14	1.511.1300.14	1.511.1301.14
PG 16	30	10	29	27	17	1.511.1600.14	1.511.1601.14
PG 21	38,5	11	32	35	23	1.511.2100.14	1.511.2101.14
PG 29	46	11	35	42	29	1.511.2900.14	1.511.2901.14
PG 36	54,5	13	41	50	37	1.511.3600.14	1.511.3601.14
PG 48	70	14	46	64	50	1.511.4800.14	1.511.4801.14
NPT 3/8"	19	15	23	17	10	1.511.3800.70	1.511.3801.70
NPT 1/2"	30	13	29	27	17	1.511.1216.70	1.511.1217.70
NPT 3/4"	38,5	13	32	35	23	1.511.3400.70	1.511.3401.70
NPT 1"	46	15	35	42	29	1.511.1000.70	1.511.1001.70

## PA 塑料配件

### PoleonFit W

Metr., PG, NPT




材质 PA 尼龙塑料

O 型圈 丁晴橡胶

防护等级 IP 54  
固定软管安装 IP 65

温度环境 -20 °C – 80 °C (-4 °F – 176 °F)

颜色 黑 (RAL 9005)




尺寸	D mm	GL mm	H mm	L mm	Ø mm	适配	订货号 黑
M 16 x 1,5	20	8	23	43	19	10	1.513.1601.50
M 20 x 1,5	26,5	9	30,5	52	24	14	1.513.2001.50
M 25 x 1,5	38,5	11	40	70	33	23	1.513.2501.50
M 32 x 1,5	46	11	51,5	83	42	29	1.513.3201.50
PG 9	19	8	23	43	19	10	1.513.0901.14
PG 11	23	8	27	48	22	12	1.513.1101.14
PG 13,5	26,5	9	30,5	52	24	14	1.513.1301.14
PG 16	30	10	32,5	56	27	17	1.513.1601.14
PG 21	38,5	11	40	70	33	23	1.513.2101.14
PG 29	46	11	51,5	83	42	29	1.513.2901.14
NPT 3/8"	19	15	23	43	19	10	1.513.3801.70
NPT 1/2"	30	13	32,5	56	27	17	1.513.1217.70
NPT 3/4"	38,5	13	40	70	33	23	1.513.3401.70
NPT 1"	46	15	51,5	83	42	29	1.513.1001.70

## PoleonFit DUO-MS

Metr., PG, NPT



材质	黄铜镀镍
夹字件	PA 尼龙塑料
密封件	丁晴橡胶
防护等级	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) 在电缆接头端
温度环境	-40 °C – 100 °C (-40 °F – 212 °F)



尺寸	$\varnothing$ mm	GL mm	H mm	D mm	$\frac{1}{4}$ mm	适配	订货号
M16	05-10	6	36	23	20/20	10	1.547.1610.50
M16	03-07	6	36	23	20/20	10	1.547.1610.51
M20	10-14	6	39,5	25	24/22	12	1.547.2012.50
M20	07-12	6	39,5	25	24/22	12	1.547.2012.51
M20	10-14	6	40,5	29	28/24	14	1.547.2014.50
M20	07-12	6	40,5	29	28/24	14	1.547.2014.51
M25	13-18	7	44,5	30	30/30	17	1.547.2517.50
M25	09-16	7	44,5	30	30/30	17	1.547.2517.51
M32	18-24	8	50,5	39	40/40	23	1.547.3223.50
M32	13-20	8	50,5	39	40/40	23	1.547.3223.51
M40	22-31	8	56,5	45	50/50	29	1.547.4029.50
M40	20-26	8	56,5	45	50/50	29	1.547.4029.51
M50	32-36	9	57,5	52	57/57	37	1.547.5037.50
M50	25-31	9	57,5	52	57/57	37	1.547.5037.51
M63	37-44	10	60,5	52	68/64	50	1.547.6350.50
M63	29-35	10	60,5	52	68/64	50	1.547.6350.51
PG11	05-10	6	36	23	20/20	10	1.548.1110.01
PG11	03-07	6	36	23	20/20	10	1.548.1110.15
PG13,5	6-12	6,5	39,5	25	24/22	12	1.548.1312.01
PG13,5	5-9	6,5	39,5	25	24/22	12	1.548.1312.15
PG16	10-14	6,5	40,5	29	28/24	14	1.548.1614.01
PG16	07-12	6,5	40,5	29	28/24	14	1.548.1614.15
PG21	13-16	7	44,5	30	30/30	17	1.548.2117.01
PG21	09-16	7	44,5	30	30/30	17	1.548.2117.15
PG29	18-22	8	50,5	39	40/40	23	1.548.2923.01
PG29	13-20	8	50,5	39	40/40	23	1.548.2923.15
PG36	22-28	8	56,5	45	50/50	29	1.548.3629.01
PG36	20-26	8	56,5	45	50/50	29	1.548.3629.15
PG42	32-36	9	57,5	52	57/57	37	1.548.4237.01
PG42	25-31	9	57,5	52	57/57	37	1.548.4237.15
PG48	37-44	10	60,5	52	64/64	50	1.548.4850.01
PG48	29-35	10	60,5	52	64/64	50	1.548.4850.15




# PA 塑料配件

## PoleonFit DUO-PA

Metr., PG, NPT



材质	黄铜镀镍
密封件	丁睛橡胶
防护等级	IP 68 – 10 bar / IP 69K (NEMA 6 – 150 PSIG) 在电缆接头端
温度环境	-40 °C – 100 °C (-40 °F – 212 °F)
颜色	黑 (RAL 9005)






尺寸	$\text{Ø}$ mm	GL mm	H mm	D mm	$\text{Ø}$ mm	适配	订货号 黑
M 16	05-10	8	40	23	22	10	1.542.1610.50
M 16	03-07	8	40	23	22	10	1.542.1610.51
M 20	06-12	10	44	25	24	12	1.542.2012.50
M 20	05-09	10	44	25	24	12	1.542.2012.51
M 20	10-14	10	46	29	27	14	1.542.2014.50
M 20	07-12	10	46	29	27	14	1.542.2014.51
M 25	13-18	11	50	30	33	17	1.542.2517.50
M 25	09-16	11	50	30	33	17	1.542.2517.51
M 32	18-24	11	60	39	42	23	1.542.3223.50
M 32	13-20	11	60	39	42	23	1.542.3223.51
M 40	22-31	13	69	45	53	29	1.542.4029.50
M 40	20-26	13	69	45	53	29	1.542.4029.51
M 50	32-36	13	74	52	60	37	1.542.5037.50
M 50	25-31	13	74	52	60	37	1.542.5037.51
M 63	37-44	14	79	52	68	50	1.542.6350.50
M 63	29-35	14	79	52	68	50	1.542.6350.51
PG 11	05-10	8	40	23	22	10	1.543.1110.14
PG 11	03-07	8	40	23	22	10	1.543.1110.15
PG 13,5	06-12	9	44	25	24	12	1.543.1312.14
PG 13,5	05-09	9	44	25	24	12	1.543.1312.15
PG 16	10-14	10	47	29	27	14	1.543.1614.14
PG 16	07-12	10	47	29	27	14	1.543.1614.15
PG 21	13-16	11	50	30	33	17	1.543.2117.14
PG 21	09-16	11	50	30	33	17	1.543.2117.15
PG 29	18-22	11	60	39	42	23	1.543.2923.14
PG 29	13-20	11	60	39	42	23	1.543.2923.15
PG 36	22-31	13	69	45	53	29	1.543.3629.14
PG 36	20-26	13	69	45	53	29	1.543.3629.15
PG 42	32-36	13	74	52	60	37	1.543.4237.14
PG 42	25-31	13	74	52	60	37	1.543.4237.15
PG 48	37-44	14	79	52	68	50	1.543.6350.14
PG 48	29-35	14	79	52	68	50	1.543.6350.15

## R-M-PA

Metr., PG



材质	PA 尼龙塑料 (Type A/Type B), 聚丙烯 (Typ A/Typ B)
环境温度	- 20 °C – 80 °C (-4°F –176°F)
颜色	黑 (RAL 9005)



尺寸	IG mm	Type	d mm	GL mm	H mm	Ø mm	订货号 黑
M 16 x 1,5	M 12 x 1,5	B	10	8	6	20	1.273.1612.50
M 20 x 1,5	M 16 x 1,5	B	13,5	8	6	25	1.273.2016.50
M 25 x 1,5	M 20 x 1,5	B	18	8	6	29	1.273.2520.50
M 32 x 1,5	M 25 x 1,5	B	23	10	6	36	1.273.3225.50
M 40 x 1,5	M 32 x 1,5	C	30	15	5		1.273.4032.50
M 50 x 1,5	M 40 x 1,5	C	38	15	5		1.273.5040.50
M 63 x 1,5	M 50 x 1,5	C	48	15	5		1.273.6350.50
M 25 x 1,5	PG 13,5	B	18	8	6	29	1.273.2513.50
M 25 x 1,5	PG 16	A	18	8	14	29	1.273.2516.50
M 32 x 1,5	PG 21	A	25	10	15	36	1.273.3221.50
M 40 x 1,5	PG 29	A	33	10	15	45	1.273.4029.50
M 50 x 1,5	PG 36	A	43	12	17	55	1.273.5036.50
M 63 x 1,5	PG 42	C	52	15	5		1.273.6342.50
PG 9	M 12 x 1,5	C	15	19	8,5		1.273.0912.11
PG 11	M 16 x 1,5	C	15	19	11,5		1.273.1116.11
PG 13,5	M 16 x 1,5	B	25	8	6	14	1.273.1316.11
PG 16	M 20 x 1,5	A	27	8	13	16	1.273.1620.11
PG 21	M 25 x 1,5	C	15	19	20,5		1.273.2125.11
PG 29	M 32 x 1,5	C	15	19	28		1.273.2932.11
PG 36	M 40 x 1,5	C	15	5	38		1.273.3640.11
PG 42	M 40 x 1,5	C	15	5	38		1.273.4240.11
PG 48	M 50 x 1,5	C	15	5	38		1.273.4850.11




## Accessories Polyamide


E-M-PA, K-FS

Metr., PG



材质	PA 尼龙塑料 (Type A/Type B), 聚丙烯 (Type C)
环境温度	-20 °C – 80 °C (-4 °F – 176 °F)
颜色	K-FS 灰 (RAL 7035), E-M-PA 黑 (RAL 9005)



尺寸	IG mm	Type	d mm	GL mm	H mm	 mm	订货号
M 12 x 1,5	M 16 x 1,5	A	6,5	8	12	21	1.239.1216.50
M 16 x 1,5	M 20 x 1,5	A	9	8	13	25	1.239.1620.50
M 20 x 1,5	M 25 x 1,5	A	14	8	15	30	1.239.2025.50
M 25 x 1,5	M 32 x 1,5	C	16,5	15	15		1.239.2532.50
M 32 x 1,5	M 40 x 1,5	C	23	15	19,5		1.239.3240.50
M 40 x 1,5	M 50 x 1,5	C	30	15	19,5		1.239.4050.50
M 50 x 1,5	M 63 x 1,5	C	39	15	20		1.239.5063.50
M 12 x 1,5	PG 7	A	6,5	8	12	17	1.239.1207.50
M 16 x 1,5	PG 9	C	8,5	1	19		1.239.1609.50
M 20 x 1,5	PG 13,5	A	14	8	13	25	1.239.2013.50
M 63 x 1,5	PG 48	C	51	15	20		1.239.6348.50
PG 7	M 12 x 1,5	C	6	15	19		1.239.0712.11
PG 9	M 16 x 1,5	A	9	8	12	21	1.239.0916.11
PG 11	M 20 x 1,5	C	11,5	15	19		1.239.1120.11
PG 13,5	M 20 x 1,5	A	14	8	13	25	1.239.1320.11
PG 16	M 25 x 1,5	A	16	8	15	30	1.239.1625.11
PG 21	M 32 x 1,5	A	21	8	15	37	1.239.2132.11
PG 29	M 40 x 1,5	A	30	10	17	45	1.239.2940.11
PG 36	M 50 x 1,5	C	37	15	19,5		1.239.3650.11
PG 42	M 50 x 1,5	C	43	15	19,5		1.239.4250.11
PG 48	M 63 x 1,5	C	48	15	20		1.239.4863.11
PG 11	PG 13,5	B	12,5	8	15	24	1.233.1113.11
PG 13,5	PG 16	B	15	9	16	27	1.233.1316.11
PG 16	PG 21	B	16	10	19	32	1.233.1621.11
PG 21	PG 29	B	22,5	11	21	42	1.233.2129.11

GM-FS

Metr., PG, NPT





材质 PA 尼龙塑料, V0 等级, 参照 UL 94

环境温度 -40 °C – 100 °C (-40°F – 212°F)

颜色 灰 (RAL 7035), 黑 (RAL 9005)

建议:  
- 其他颜色请垂询

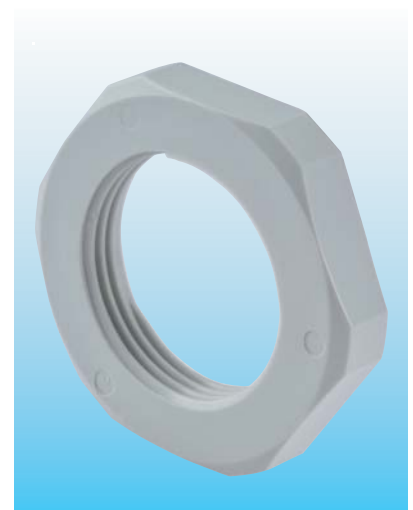

IG	H mm	 mm	订货号 PA V0 灰	订货号 PA V0 黑
M 12 x 1,5	5	17	1.262.1200.50	1.262.1201.50
M 16 x 1,5	5	22	1.262.1600.50	1.262.1601.50
M 20 x 1,5	6	27	1.262.2000.50	1.262.2001.50
M 25 x 1,5	6,5	32	1.262.2500.50	1.262.2501.50
M 32 x 1,5	7	41	1.262.3200.50	1.262.3201.50
M 40 x 1,5	7	50	1.262.4000.50	1.262.4001.50
M 50 x 1,5	8	60	1.262.5000.50	1.262.5001.50
M 63 x 1,5	8	75	1.262.6300.50	1.262.6301.50
PG 7	5	19	1.262.0700.11	1.262.0701.11
PG 9	5	22	1.262.0900.11	1.262.0901.11
PG 11	5	24	1.262.1100.11	1.262.1101.11
PG 13,5	6	27	1.262.1300.11	1.262.1301.11
PG 16	6	30	1.262.1600.11	1.262.1601.11
PG 21	7	36	1.262.2100.11	1.262.2101.11
PG 29	7	46	1.262.2900.11	1.262.2901.11
PG 36	8	60	1.262.3600.11	1.262.3601.11
PG 42	8	65	1.262.4200.11	1.262.4201.11
PG 48	8	70	1.262.4800.11	1.262.4801.11
NPT 3/8"	7	24	1.262.3800.70	1.262.3801.70
NPT 1/2"	6	27	1.262.1200.70	1.262.1201.70
NPT 3/4"	7	32	1.262.3400.70	1.262.3401.70
NPT 1"	7	40	1.262.1000.70	1.262.1001.70