


工业用电缆接头


Ex 附件

在这一章中您可以找到应用于增安型和隔爆型危险场所的所有工业用电缆接头系列的附件

- 144页起尼龙塑料附件
- 147页起黄铜镀镍附件
- 151页起不锈钢附件



Ex 附件

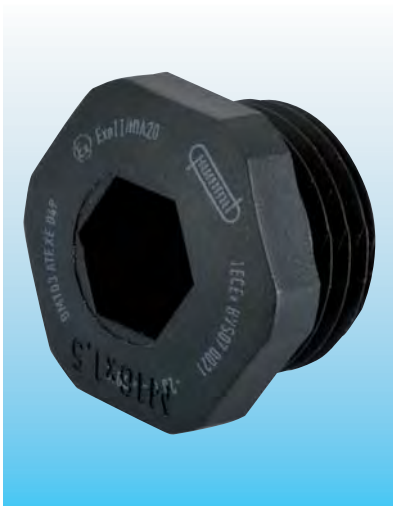
Metr.
V-Ex

材料 纤维增强尼龙塑料 (PA)

O型圈 Buna-N

防护等级 IP68-10巴/IP69K(NEMA 6- 150 PSIG)

环境温度 -20° C-90° C (-4°F-194°F)

颜色 黑色 (RAL 9005)

 国际认证请见176页
 或者访问我们的主页www.hummel.com
II 2G 1D


AG	GL mm	H mm	D mm	mm	mm	订货号
M 12 x 1,5	8,5	13	16,5	15	6	1.297.1201.50
M 16 x 1,5	8,5	13	20,5	19	8	1.297.1601.50
M 20 x 1,5	9	14,5	25,5	24	8	1.297.2001.50
M 25 x 1,5	10,5	16	30,5	28	8	1.297.2501.50
M 32 x 1,5	11,5	17,5	38	36	8	1.297.3201.50
M 40 x 1,5	11,5	18	48	46	8	1.297.4001.50
M 50 x 1,5	13,5	20	60	55	8	1.297.5001.50
M 63 x 1,5	14,5	21	75	70	8	1.297.6301.50

V-Ex

PG

RoHS



材料 纤维增强尼龙塑料 (PA)



O型圈 Buna-N



II 2G 1D

防护等级 IP68-10巴/IP69K(NEMA 6- 150 PSIG)

环境温度 -20° C-90° C (-4°F-194°F)

国际认证请见176页
或者访问我们的主页www.hummel.com

颜色 黑色 (RAL 9005)

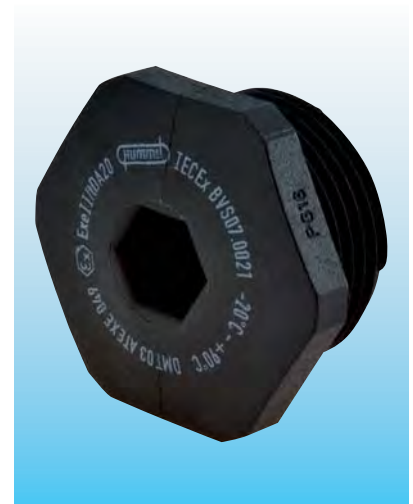

AG	GL mm	H mm	D mm	mm	mm	订货号
PG 7	8,5	13	16,5	15	6	1.297.0701.11
PG 9	8,5	13	20,5	19	8	1.297.0901.11
PG 11	9	14,5	25,5	24	8	1.297.1101.11
PG 13,5	9	14,5	25,5	24	8	1.297.1301.11
PG 16	10,5	16	30,5	28	8	1.297.1601.11
PG 21	11,5	17,5	38	36	8	1.297.2101.11
PG 29	11,5	18	48	46	8	1.297.2901.11
PG 36	13,5	20	60	55	8	1.297.3601.11
PG 42	13,5	20	65	60	8	1.297.4201.11
PG 48	14,5	21	75	70	8	1.297.4801.11

Ex 附件

HSK-V-Ex

Metr., PG, NPT




材料 弹性橡胶

环境温度 -40° C-95° C (-40°F-203°F)

颜色 黑色 (RAL 9005)

建议:
- 加长型螺纹请垂询



II 2G 1D

国际认证请见176页
或者访问我们的主页www.hummel.com

适合以下规格尺寸			D mm	d mm	H mm	h mm	订货号
PG 7	M12 x 1,5		9,5	6,3	11,5	4,5	1.296.0701.11
PG 9	M16 x 1,5	NPT 3/8"	11	7,8	13,5	5,5	1.296.0901.11
PG 11	M 16 x 1,5		13,5	9,8	14,5	5,5	1.296.1101.11
PG 13,5	M 20 x 1,5	NPT 1/2"	16	11,8	18	8	1.296.1301.11
PG 16	M 20 x 1,5	NPT 1/2"/16	18,5	13,8	19	9	1.296.1601.11
PG 21	M 25 x 1,5	NPT 3/4"	22	17,8	22	11	1.296.2101.11
PG 29	M 32 x 1,5	NPT 1" NPT 1 1/4"	29	25	25	10	1.296.2901.11
PG 36	M 40 x 1,5	NPT 1 1/2"	38	32	28	11	1.296.3601.11
PG 42	M 50 x 1,5		43	38	30	12	1.296.4201.11
PG 48	M 63 x 1,5		49	44	30	12	1.296.4801.11

HSK-V-Ex MZ 类型

Metr., PG, NPT




材料 弹性橡胶

环境温度 -40° C-95° C (-40°F-203°F)

颜色 黑色 (RAL 9005)

建议:
- 此堵头适用于所有带夹紧装置的HSK接头



II 2G 1D

国际认证请见176页
或者访问我们的主页www.hummel.com

适合以下规格尺寸			D mm	d mm	H mm	h mm	订货号
PG 7	M12 x 1,5		9,5	6,3	18	4,5	1.296.0701.61
PG 9	M16 x 1,5	NPT 3/8"	11	7,8	20,5	5,5	1.296.0901.61
PG 11	M 16 x 1,5		13,5	9,8	22	5,5	1.296.1101.61
PG 13,5	M 20 x 1,5	NPT 1/2"	16	11,8	26,5	8	1.296.1301.61
PG 16	M 20 x 1,5	NPT 1/2"/16	18,5	13,8	28,4	9	1.296.1601.61
PG 21	M 25 x 1,5	NPT 3/4"	22	17,8	32	11	1.296.2101.61
PG 29	M 32 x 1,5	NPT 1" NPT 1 1/4"	29	25	35,5	10	1.296.2901.61
PG 36	M 40 x 1,5	NPT 1 1/2"	38	32	39	11	1.296.3601.61
PG 42	M 50 x 1,5		43	38	42,5	12	1.296.4201.61
PG 48	M 63 x 1,5		49	44	42,5	12	1.296.4801.61

V-Ms-Ex / V-Ms-FPM-Ex / V-Ms-VMQ-Ex **Metr.**

II 2G 1D

材料	黄铜镀镍
防护等级	IP68-10巴/IP69K(NEMA 6- 150 PSIG)
V-Ms-Ex O型圈	Buna-N
V-Ms-FPM-Ex O型圈	FPM
V-Ms-VMQ-Ex O型圈	VMQ
环境温度	-20° C-95° C (-4°F-203°F)(Buna-N) -20° C-180° C (-4°F-356°F)(FPM), -60° C-180° C (-76°F-356°F)(VMQ)

国际认证请见176页
或者访问我们的主页www.hummel.com

AG	GL mm	H mm	mm	订货号 V-Ms-Ex -20° C-95° C (-4°F-203°F)	订货号 V-Ms-FPM-Ex -20° C-180° C (-4°F-356°F)	订货号 V-Ms-VMQ-Ex -60° C-180° C (-76°F-356°F)
M 12 x 1,5	6,5	9,5	14	1.197.1200.50	1.198.1200.50	1.199.1200.50
M 16 x 1,5	6	9	19	1.197.1600.50	1.198.1600.50	1.199.1600.50
M 20 x 1,5	6	9,5	22	1.197.2000.50	1.198.2000.50	1.199.2000.50
M 25 x 1,5	7	10,5	30	1.197.2500.50	1.198.2500.50	1.199.2500.50
M 32 x 1,5	8	12,5	41	1.197.3200.50	1.198.3200.50	1.199.3200.50
M 40 x 1,5	8	13	46	1.197.4000.50	1.198.4000.50	1.199.4000.50
M 50 x 1,5	9	15	55	1.197.5000.50	1.198.5000.50	1.199.5000.50
M 63 x 1,5	10	16,5	70	1.197.6300.50	1.198.6300.50	1.199.6300.50

V-Ms-Ex / V-Ms-FPM-Ex / V-Ms-VMQ-Ex **PG**

II 2G 1D

材料	黄铜镀镍
防护等级	IP68-10巴/IP69K(NEMA 6- 150 PSIG)
V-Ms-Ex O型圈	Buna-N
V-Ms-FPM-Ex O型圈	FPM
V-Ms-VMQ-Ex O型圈	VMQ
环境温度	-20° C-95° C (-4°F-203°F)(Buna-N) -20° C-180° C (-4°F-356°F)(FPM), -60° C-180° C (-76°F-356°F)(VMQ)


国际认证请见176页
或者访问我们的主页www.hummel.com

AG	GL mm	H mm	mm	订货号 V-Ms-Ex -20° C-95° C (-4°F-203°F)	订货号 V-Ms-FPM-Ex -20° C-180° C (-4°F-356°F)	订货号 V-Ms-VMQ-Ex -60° C-180° C (-76°F-356°F)
PG 7	5	8	14	1.197.0700.01	1.198.0700.01	1.199.0700.01
PG 9	6	9	17	1.197.0900.01	1.198.0900.01	1.199.0900.01
PG 11	6	9,5	20	1.197.1100.01	1.198.1100.01	1.199.1100.01
PG 13,5	6,5	10	22	1.197.1300.01	1.198.1300.01	1.199.1300.01
PG 16	6,5	10	24	1.197.1600.01	1.198.1600.01	1.199.1600.01
PG 21	7	10,5	30	1.197.2100.01	1.198.2100.01	1.199.2100.01
PG 29	8	12,5	41	1.197.2900.01	1.198.2900.01	1.199.2900.01
PG 36	8	13	50	1.197.3600.01	1.198.3600.01	1.199.3600.01
PG 42	9	15	58	1.197.4200.01	1.198.4200.01	1.199.4200.01
PG 48	10	16,5	65	1.197.4800.01	1.198.4800.01	1.199.4800.01

Ex 附件

RSD-MS-Ex


Metr.

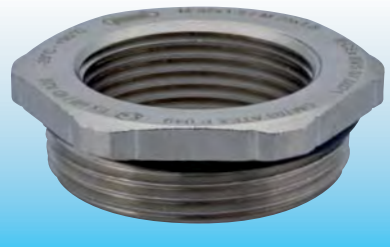

材料	黄铜镀镍
O型圈	Buna-N/VMQ
防护等级	IP68-10巴/IP69K(NEMA 6- 150 PSIG)
环境温度	-20° C-95° C (-4° F-203° F)(Buna-N) -60° C-180° C (-76° F-356° F)(VMQ)



II 2G 1D




国际认证请见176页
或者访问我们的主页www.hummel.com

AG	IG	GL	mm	mm	mm	mm	订货号 Buna-N -20° C-95° C (-4° F-203° F)	订货号 VMQ -60° C-180° C (-76° F-356° F)	AG	IG	GL	mm	mm	mm	订货号 Buna-N -20° C-95° C (-4° F-203° F)	订货号 VMQ -60° C-180° C (-76° F-356° F)
M 16 x 1,5	M 12 x 1,5	5	17	1.078.1612.50	1.079.1612.50	M 50 x 1,5	M 25 x 1,5	9	55	1.078.5025.50	1.079.5025.50					
M 20 x 1,5	M 12 x 1,5	6	22	1.078.2012.50	1.079.2012.50	M 50 x 1,5	M 32 x 1,5	9	55	1.078.5032.50	1.079.5032.50					
M 20 x 1,5	M 16 x 1,5	6	22	1.078.2016.50	1.079.2016.50	M 50 x 1,5	M 40 x 1,5	9	55	1.078.5040.50	1.079.5040.50					
M 25 x 1,5	M 16 x 1,5	7	27	1.078.2516.50	1.079.2516.50	M 63 x 1,5	M 32 x 1,5	10	65	1.078.6332.50	1.079.6332.50					
M 25 x 1,5	M 20 x 1,5	7	27	1.078.2520.50	1.079.2520.50	M 63 x 1,5	M 40 x 1,5	10	65	1.078.6340.50	1.079.6340.50					
M 32 x 1,5	M 16 x 1,5	8	34	1.078.3216.50	1.079.3216.50	M 63 x 1,5	M 50 x 1,5	10	65	1.078.6350.50	1.079.6350.50					
M 32 x 1,5	M 20 x 1,5	8	34	1.078.3220.50	1.079.3220.50											
M 32 x 1,5	M 25 x 1,5	8	34	1.078.3225.50	1.079.3225.50											
M 40 x 1,5	M 20 x 1,5	8	43	1.078.4020.50	1.079.4020.50											
M 40 x 1,5	M 25 x 1,5	8	43	1.078.4025.50	1.079.4025.50											
M 40 x 1,5	M 32 x 1,5	8	43	1.078.4032.50	1.079.4032.50											

RSD-MS-Ex


PG

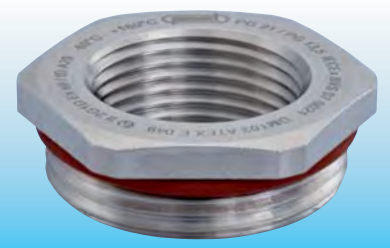

材料	黄铜镀镍
O型圈	Buna-N/VMQ
防护等级	IP68-10巴/IP69K(NEMA 6- 150 PSIG)
环境温度	-20° C-95° C (-4° F-203° F)(Buna-N) -60° C-180° C (-76° F-356° F)(VMQ)



II 2G 1D




国际认证请见176页
或者访问我们的主页www.hummel.com

AG	IG	GL	H	mm	mm	mm	mm	订货号 Buna-N -20° C-95° C (-4° F-203° F)	订货号 VMQ -60° C-180° C (-76° F-356° F)	AG	IG	GL	H	mm	mm	mm	订货号 Buna-N -20° C-95° C (-4° F-203° F)	订货号 VMQ -60° C-180° C (-76° F-356° F)
PG 9	PG 7	6	8,8	17	1.078.0907.01	1.079.0907.01	PG 29	PG 21	8	11,5	40	1.078.2921.01	1.079.2921.01					
PG 11	PG 7	6	9	20	1.078.1107.01	1.079.1107.01	PG 36	PG 21	9	12,5	50	1.078.3621.01	1.079.3621.01					
PG 11	PG 9	6	9	20	1.078.1109.01	1.079.1109.01	PG 36	PG 29	9	12,5	50	1.078.3629.01	1.079.3629.01					
PG 13,5	PG 9	6,5	9,5	22	1.078.1309.01	1.079.1309.01	PG 42	PG 29	10	13,5	57	1.078.4229.01	1.079.4229.01					
PG 16	PG 9	6,5	9,5	24	1.078.1609.01	1.079.1609.01	PG 42	PG 36	10	13,5	57	1.078.4236.01	1.079.4236.01					
PG 16	PG 11	6,5	9,5	24	1.078.1611.01	1.079.1611.01	PG 48	PG 36	10	13,5	64	1.078.4836.01	1.079.4836.01					
PG 16	PG 13,5	6,5	9,5	24	1.078.1613.01	1.079.1613.01	PG 48	PG 42	10	13,5	64	1.078.4842.01	1.079.4842.01					
PG 21	PG 11	7	10,3	30	1.078.2111.01	1.079.2111.01												
PG 21	PG 13,5	7	10,3	30	1.078.2113.01	1.079.2113.01												
PG 21	PG 16	7	10,3	30	1.078.2116.01	1.079.2116.01												
PG 29	PG 16	8	11,5	40	1.078.2916.01	1.079.2916.01												

Ex 附件

RSD-MS-Ex-d

Metr.

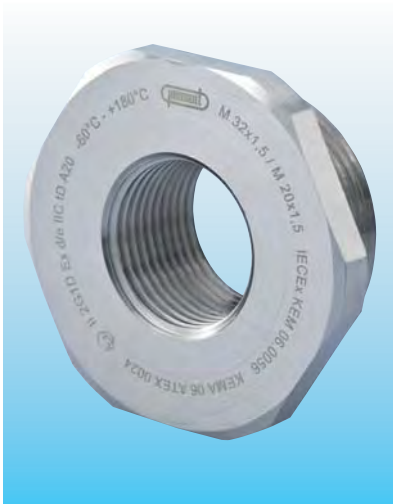

材料 黄铜镀镍



O型圈 Buna-N/VMQ




防护等级 IP68-10巴/IP69K(NEMA 6- 150 PSIG)

II 2G 1D Ex d IIC

环境温度 -20° C-95° C (-4° F-203° F)(Buna-N)
-60° C-180° C (-76° F-356° F)(VMQ)

国际认证请见176页
或者访问我们的主页www.hummel.com



AG	IG	GL mm	H mm	mm	订货号 Buna-N -20° C-95° C (-4° F-203° F)	订货号 VMQ -60° C-180° C (-76° F-356° F)
M 16 x 1,5	M 12 x 1,5	16	19	19	1.878.1612.50	1.879.1612.50
M 20 x 1,5	M 12 x 1,5	16	19,5	22	1.878.2012.50	1.879.2012.50
M 20 x 1,5	M 16 x 1,5	16	19,5	22	1.878.2016.50	1.879.2016.50
M 25 x 1,5	M 16 x 1,5	16	19,5	30	1.878.2516.50	1.879.2516.50
M 25 x 1,5	M 20 x 1,5	16	19,5	30	1.878.2520.50	1.879.2520.50
M 32 x 1,5	M 16 x 1,5	16	20,5	41	1.878.3216.50	1.879.3216.50
M 32 x 1,5	M 20 x 1,5	16	20,5	41	1.878.3220.50	1.879.3220.50
M 32 x 1,5	M 25 x 1,5	16	20,5	41	1.878.3225.50	1.879.3225.50
M 40 x 1,5	M 20 x 1,5	16	21	46	1.878.4020.50	1.879.4020.50
M 40 x 1,5	M 25 x 1,5	16	21	46	1.878.4025.50	1.879.4025.50
M 40 x 1,5	M 32 x 1,5	16	21	46	1.878.4032.50	1.879.4032.50

V-INOX-Ex Metr.

II 2G 1D

材料 不锈钢(1.4305)

防护等级 IP68-10巴/IP69K(NEMA 6- 150 PSIG)

V-INOX-Ex O型圈 Buna-N

V-INOX-FPM-Ex O型圈 FPM

V-INOX-VMQ-Ex O型圈 VMQ

环境温度 -20° C-95° C (-4°F-203°F)(Buna-N)
-20° C-180° C (-4°F-356°F)(FPM), -60° C-180° C (-76°F-356°F)(VMQ)

国际认证请见176页
或者访问我们的主页www.hummel.com

AG	GL mm	H mm	mm	订货号 V-INOX-Ex -20° C-95° C (-4°F-203°F)	订货号 V-INOX-FPM-Ex -20° C-180° C (-4°F-356°F)	订货号 V-INOX-VMQ-Ex -60° C-180° C (-76°F-356°F)
M 12 x 1,5	6,5	9,5	14	1.192.1200.50	1.193.1200.50	1.194.1200.50
M 16 x 1,5	6	9	19	1.192.1600.50	1.193.1600.50	1.194.1600.50
M 20 x 1,5	6	9,5	22	1.192.2000.50	1.193.2000.50	1.194.2000.50
M 25 x 1,5	7	10,5	30	1.192.2500.50	1.193.2500.50	1.194.2500.50
M 32 x 1,5	8	12,5	41	1.192.3200.50	1.193.3200.50	1.194.3200.50
M 40 x 1,5	8	13	46	1.192.4000.50	1.193.4000.50	1.194.4000.50
M 50 x 1,5	9	15	55	1.192.5000.50	1.193.5000.50	1.194.5000.50
M 63 x 1,5	10	16,5	70	1.192.6300.50	1.193.6300.50	1.194.6300.50

V-INOX-Ex PG

II 2G 1D

材料 不锈钢(1.4305)

防护等级 IP68-10巴/IP69K(NEMA 6- 150 PSIG)

V-INOX-Ex O型圈 Buna-N

V-INOX-FPM-Ex O型圈 FPM

V-INOX-VMQ-Ex O型圈 VMQ

环境温度 -20° C-95° C (-4°F-203°F)(Buna-N)
-20° C-180° C (-4°F-356°F)(FPM), -60° C-180° C (-76°F-356°F)(VMQ)


国际认证请见176页
或者访问我们的主页www.hummel.com

AG	GL mm	H mm	mm	订货号 V-INOX-Ex -20° C-95° C (-4°F-203°F)	订货号 V-INOX-FPM-Ex -20° C-180° C (-4°F-356°F)	订货号 V-INOX-VMQ-Ex -60° C-180° C (-76°F-356°F)
PG 7	5	8	14	1.192.0700.01	1.193.0700.01	1.194.0700.01
PG 9	6	9	17	1.192.0900.01	1.193.0900.01	1.194.0900.01
PG 11	6	9,5	20	1.192.1100.01	1.193.1100.01	1.194.1100.01
PG 13,5	6,5	10	22	1.192.1300.01	1.193.1300.01	1.194.1300.01
PG 16	6,5	10	24	1.192.1600.01	1.193.1600.01	1.194.1600.01
PG 21	7	10,5	30	1.192.2100.01	1.193.2100.01	1.194.2100.01
PG 29	8	12,5	41	1.192.2900.01	1.193.2900.01	1.194.2900.01
PG 36	8	13	50	1.192.3600.01	1.193.3600.01	1.194.3600.01
PG 42	9	15	58	1.192.4200.01	1.193.4200.01	1.194.4200.01
PG 48	10	16,5	65	1.192.4800.01	1.193.4800.01	1.194.4800.01

Ex 附件

RSD-INOX-Ex


Metr.

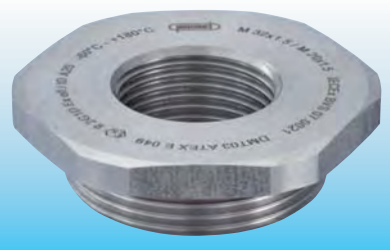

材料	不锈钢(1.4305)
O型圈	Buna-N/VMQ
防护等级	IP68-10巴/IP69K(NEMA 6- 150 PSIG)
环境温度	-20° C-95° C (-4°F-203°F)(Buna-N) -60° C-180° C (-76°F-356°F)(VMQ)



II 2G 1D




国际认证请见176页
或者访问我们的主页www.hummel.com

AG	IG	GL	H	U	订货号 Buna-N -20° C-95° C (-4°F-203°F)	订货号 VMQ -60° C-180° C (-76°F-356°F)	AG	IG	GL	H	U	订货号 Buna-N -20° C-95° C (-4°F-203°F)	订货号 VMQ -60° C-180° C (-76°F-356°F)
M 16 x 1,5	M 12 x 1,5	5	17		1.098.1612.50	1.099.1612.50	M 50 x 1,5	M 25 x 1,5	9	55		1.098.5025.50	1.099.5025.50
M 20 x 1,5	M 12 x 1,5	6	22		1.098.2012.50	1.099.2012.50	M 50 x 1,5	M 32 x 1,5	9	55		1.098.5032.50	1.099.5032.50
M 20 x 1,5	M 16 x 1,5	6	22		1.098.2016.50	1.099.2016.50	M 50 x 1,5	M 40 x 1,5	9	55		1.098.5040.50	1.099.5040.50
M 25 x 1,5	M 16 x 1,5	7	27		1.098.2516.50	1.099.2516.50	M 63 x 1,5	M 32 x 1,5	10	65		1.098.6332.50	1.099.6332.50
M 25 x 1,5	M 20 x 1,5	7	27		1.098.2520.50	1.099.2520.50	M 63 x 1,5	M 40 x 1,5	10	65		1.098.6340.50	1.099.6340.50
M 32 x 1,5	M 16 x 1,5	8	34		1.098.3216.50	1.099.3216.50	M 63 x 1,5	M 50 x 1,5	10	65		1.098.6350.50	1.099.6350.50
M 32 x 1,5	M 20 x 1,5	8	34		1.098.3220.50	1.099.3220.50							
M 32 x 1,5	M 25 x 1,5	8	34		1.098.3225.50	1.099.3225.50							
M 40 x 1,5	M 20 x 1,5	8	43		1.098.4020.50	1.099.4020.50							
M 40 x 1,5	M 25 x 1,5	8	43		1.098.4025.50	1.099.4025.50							
M 40 x 1,5	M 32 x 1,5	8	43		1.098.4032.50	1.099.4032.50							

RSD-INOX-Ex


PG

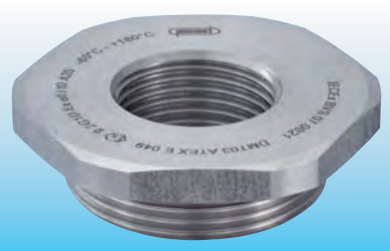

材料	不锈钢(1.4305)
O型圈	Buna-N/VMQ
防护等级	IP68-10巴/IP69K(NEMA 6- 150 PSIG)
环境温度	-20° C-95° C (-4°F-203°F)(Buna-N) -60° C-180° C (-76°F-356°F)(VMQ)



II 2G 1D



国际认证请见176页
或者访问我们的主页www.hummel.com

AG	IG	GL	H	U	订货号 Buna-N -20° C-95° C (-4°F-203°F)	订货号 VMQ -60° C-180° C (-76°F-356°F)	AG	IG	GL	H	U	订货号 Buna-N -20° C-95° C (-4°F-203°F)	订货号 VMQ -60° C-180° C (-76°F-356°F)
PG 9	PG 7	6	8,8	17	1.098.0907.01	1.099.0907.01	PG29	PG 16	8	11,5	40	1.098.2916.01	1.099.2916.01
PG 11	PG 7	6	9	20	1.098.1107.01	1.099.1107.01	PG29	PG 21	8	11,5	40	1.098.2921.01	1.099.2921.01
PG 11	PG 9	6	9	20	1.098.1109.01	1.099.1109.01	PG 36	PG 21	9	12,5	50	1.098.3621.01	1.099.3621.01
PG 13,5	PG 9	6,5	9,5	22	1.098.1309.01	1.099.1309.01	PG36	PG 29	9	12,5	50	1.098.3629.01	1.099.3629.01
PG 13,5	PG 11	6,5	9,5	22	1.098.1311.01	1.099.1311.01	PG42	PG 29	10	13,5	57	1.098.4229.01	1.099.4229.01
PG16	PG 9	6,5	9,5	24	1.098.1609.01	1.099.1609.01	PG 42	PG 36	10	13,5	57	1.098.4236.01	1.099.4236.01
PG16	PG 11	6,5	9,5	24	1.098.1611.01	1.099.1611.01	PG 48	PG 36	10	13,5	64	1.098.4836.01	1.099.4836.01
PG16	PG 13,5	6,5	9,5	24	1.098.1613.01	1.099.1613.01	PG 48	PG 42	10	13,5	64	1.098.4842.01	1.099.4842.01
PG 21	PG 11	7	10,3	30	1.098.2111.01	1.099.2111.01							
PG21	PG 13,5	7	10,3	30	1.098.2113.01	1.099.2113.01							
PG21	PG 16	7	10,3	30	1.098.2116.01	1.099.2116.01							

V-INOX-Ex-d


Metr., NPT



II 2G 1D Ex d IIC

国际认证请见176页
或者访问我们的主页www.hummel.com

材料	不锈钢(1.4404)
防护等级	IP68-10巴/IP69K(NEMA 6- 150 PSIG)
O型圈	Buna-N/FPM/VMQ
环境温度	-20° C-95° C (-4°F-203°F)(Buna-N) -20° C-180° C (-4°F-356°F)(FPM), -60° C-180° C (-76°F-356°F)(VMQ)




AG	GL mm	H mm	mm	订货号 不带O型圈	订货号 Buna-N -20° C-95° C (-4°F-203°F)	订货号 FPM -20° C-180° C (-4°F-356°F)	订货号 VMQ -60° C-180° C (-76°F-356°F)
M 12 x 1,5	16	19	14		1.895.1200.50	1.896.1200.50	1.897.1200.50
M 16 x 1,5	16	19	19		1.895.1600.50	1.896.1600.50	1.897.1600.50
M 20 x 1,5	16	19,5	22		1.895.2000.50	1.896.2000.50	1.897.2000.50
M 25 x 1,5	16	19,5	30		1.895.2500.50	1.896.2500.50	1.897.2500.50
M 32 x 1,5	16	20,5	41		1.895.3200.50	1.896.3200.50	1.897.3200.50
M 40 x 1,5	16	21	46		1.895.4000.50	1.896.4000.50	1.897.4000.50
M 50 x 1,5	16	22	55		1.895.5000.50	1.896.5000.50	1.897.5000.50
M 63 x 1,5	16	22,5	70		1.895.6300.50	1.896.6300.50	1.897.6300.50
NPT 3/8"	16	20	19	1.897.3800.70			
NPT 1/2"	20	23,5	24	1.897.1200.70			
NPT 3/4"	20,5	24	30	1.897.3400.70			
NPT 1"	25	29,5	41	1.897.1000.70			
NPT 1 1/4"	26	31	46	1.897.5400.70			
NPT 1 1/2"	26,5	32,5	55	1.897.6400.70			

Ex 附件

RSD-INOX-Ex-d

Metr.

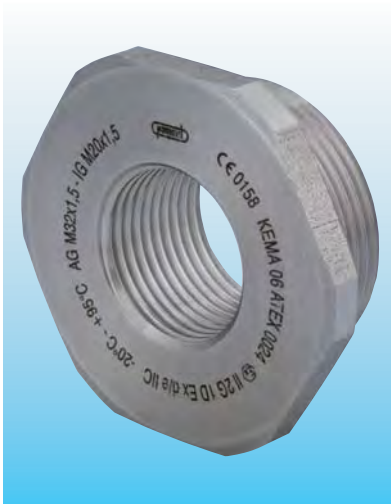

材料 不锈钢(1.4404)



O型圈 Buna-N/VMQ




防护等级 IP68-10巴/IP69K(NEMA 6- 150 PSIG)

II 2G 1D Ex d IIC

环境温度 -20° C-95° C (-4°F-203°F)(Buna-N)
-60° C-180° C (-76°F-356°F)(VMQ)

国际认证请见176页
或者访问我们的主页www.hummel.com



AG	IG	GL mm	H mm	mm	订货号 Buna-N -20° C-95° C (-4°F-203°F)	订货号 VMQ -60° C-180° C (-76°F-356°F)
M 16 x 1,5	M 12 x 1,5	16	19	19	1.898.1612.50	1.899.1612.50
M 20 x 1,5	M 12 x 1,5	16	19,5	22	1.898.2012.50	1.899.2012.50
M 20 x 1,5	M 16 x 1,5	16	19,5	22	1.898.2016.50	1.899.2016.50
M 25 x 1,5	M 16 x 1,5	16	19,5	30	1.898.2516.50	1.899.2516.50
M 25 x 1,5	M 20 x 1,5	16	19,5	30	1.898.2520.50	1.899.2520.50
M 32 x 1,5	M 16 x 1,5	16	20,5	41	1.898.3216.50	1.899.3216.50
M 32 x 1,5	M 20 x 1,5	16	20,5	41	1.898.3220.50	1.899.3220.50
M 32 x 1,5	M 25 x 1,5	16	20,5	41	1.898.3225.50	1.899.3225.50
M 40 x 1,5	M 20 x 1,5	16	21	46	1.898.4020.50	1.899.4020.50
M 40 x 1,5	M 25 x 1,5	16	21	46	1.898.4025.50	1.899.4025.50
M 40 x 1,5	M 32 x 1,5	16	21	46	1.898.4032.50	1.899.4032.50